

MAAG 1385PES

GENSET

Standby Power	kVA	1385
	kW	1108
Prime Power	kVA	1250
	kW	1000
Soundproof canopy [mm]	W x L x H	2200x5550x3434
Open version [mm]	W x L x H	2200x4950x2720
Fuel tank [liter] - base	diesel	2000
Net total weight with canopy*	kg	3 600
Net total weight open version*	kg	3 000
Noise [in canopy design]	dB(A)	<85
Control panel		MGD 500L MK2

* Including lubrication oil and coolant fluid, excluding fuel

[Info] Genset characteristics:

Displays:
Phase currents (A), Phase voltages (V), Line voltages, Integrated frequency and speed display.
Cooling water temperature, operating hours counter, oil pressure indicator.

[Info] AMF Genset control:

Standard voltage-free indications: genset running, high water temperature, low oil pressure, low battery voltage.




[Info] Prime power:

Prime Power is the maximum power accessible at the variable load for an unlimited number of hours per year in a variable load setting. It is not advisable that the variable load exceed 70% average of the prime power rating during any operational period. If the engine is running at 100% prime power, yearly hours should not exceed 500. Overload situations should be avoided however a 10% overload capability is available for a 1 hour period within a 12 hour cycle of operation.

[Info] Standby power:

Standby Rating for a standby engine should be sized for a maximum of 70% average load factor and roughly 500 hours per year. Standby power ratings should never be applied except in true emergency outage situations. With standby rated generators there is no overload capability built into the units.

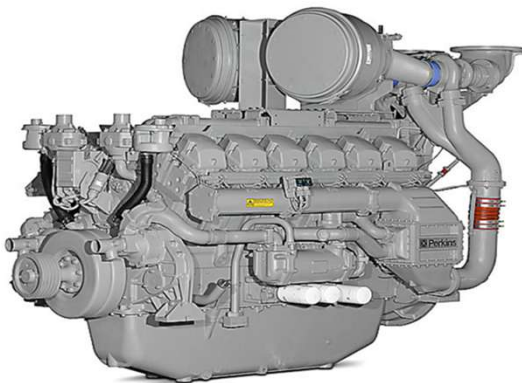

MOTOR

Manufacturer		PERKINS
Model		4012-46TWG2A
Number of cylinders		12 - 60° V
Cycle		4
Aspiration		Turbocharger - aftercooler
Cooling system		Water
Cooling circuit capacity	liter	52
Oil capacity	liter	177
Injection		direct
Speed/Frequency	rpm/Hz	1500/50
Fuel consumption	100%	259
	75%	196
	50%	143

ALTERNATOR

Manufacturer		STAMFORD
Number of Phase		3
Power factor		cos φ 0,8
Frequency [Hz]		50
Output voltage [VAC]		230 / 400 V
Protection		IP 23
Connection type		Star
Standby power	[kVA]	465
Insulation class		Class H
Model		PI734B

OTHER INFO

web: www.maagenerator.com

TANÚSÍTVÁNY

A MARTON Szakértő Iroda Kft.
2040 Budaörs, Aradi u. 32.
igazolja, hogy a

LogSol Kft.

Székhely: H-8151 Szabadbattyán, Ipar utca 098/6. hrsz.

az

szüntetéses tüpegyseggek kereskedelme, karbantartása, javítása, valamint aggregátorok, mobil aggregátorok gyártása, kereskedelme, javítása és karbantartása, egyéb általános rendeltetésű gép gyártása

érvényességi területén közzétett előírásoknak megfelelően vezetett be és alkalmas.

A tanúsítvány regisztrációs száma: 4548294

A befolyásolt adata során bizonyított nyert, hogy a rendszer

MEGFELEL

MSZ EN ISO 14001:2015

szabvány követelményeinek.

A tanúsítvány érvényes: 2020. február 27-ig

az ezután végrehajtott ellenőrzéseknek megfelelően.

Budaörs, 2020. február 28.

MARTON Szakértő Iroda Kft.
Előzetesen

IAF

IAF

IAF

IAF

IAF

IAF

IAF

IAF

IAF

IAF

IAF

IAF

IAF

IAF

IAF

IAF

IAF

IAF

IAF

IAF

IAF

IAF

TANÚSÍTVÁNY

A MARTON Szakértő Iroda Kft.
2040 Budaörs, Aradi u. 32.
igazolja, hogy a

LogSol Kft.

Székhely: H-8151 Szabadbattyán, Ipar utca 098/6. hrsz.

az

aggregátorok, mobil aggregátorok gyártása, karbantartása, javítása, kereskedelme, valamint szüntetéses tüpegyseggek karbantartása, javítása, kereskedelme, egyéb általános rendeltetésű gép gyártása

érvényességi területén közzétett előírásoknak megfelelően vezetett be és alkalmas.

A tanúsítvány regisztrációs száma: 8092190

A befolyásolt adata során bizonyított nyert, hogy a rendszer

MEGFELEL

MSZ EN ISO 9001:2015

szabvány követelményeinek.

A tanúsítvány érvényes: 2020. február 09-ig

az ezután végrehajtott ellenőrzéseknek megfelelően.

Budaörs, 2020. február 03.

MARTON Szakértő Iroda Kft.
Előzetesen

IAF

IAF

IAF

IAF

IAF

IAF

IAF

IAF

IAF

IAF

IAF

IAF

IAF

IAF

IAF

IAF

IAF

IAF

IAF

IAF

IAF

IAF

All of our products are made in Hungary in our own factory. Please kindly be notified that We reserve the right to make changes without the prior consent of the buyer except the standby and prime power which are always guaranteed. Thank you for understanding.
All pictures shown here are for illustration purpose only.



MSZ EN ISO 14001:2015, MSZ EN ISO 9001:2015