

## MAAG 2250PES

### GENSET

Standby Power	kVA	2250
	kW	1800
Prime Power	kVA	2050
	kW	1640
Soundproof canopy [mm]	W x L x H	custom size
Open version [mm]	W x L x H	2400x6350x3020
Fuel tank [liter] - base	diesel	4000
Net total weight with canopy*	kg	3 600
Net total weight open version*	kg	3 000
Noise [in canopy design]	dB(A)	<85
Control panel		MGD 500L MK2

\* Including lubrication oil and coolant fluid, excluding fuel

#### [Info] Genset characteristics:

Displays:  
Phase currents (A), Phase voltages (V), Line voltages, Integrated frequency and speed display.  
Cooling water temperature, operating hours counter, oil pressure indicator.

#### [Info] AMF Genset control:

Standard voltage-free indications: genset running, high water temperature, low oil pressure, low battery voltage.




#### [Info] Prime power:

**Prime Power** is the maximum power accessible at the variable load for an unlimited number of hours per year in a variable load setting. It is not advisable that the variable load exceed 70% average of the prime power rating during any operational period. If the engine is running at 100% prime power, yearly hours should not exceed 500. Overload situations should be avoided however a 10% overload capability is available for a 1 hour period within a 12 hour cycle of operation.

#### [Info] Standby power:

**Standby Rating** for a standby engine should be sized for a maximum of 70% average load factor and roughly 500 hours per year. Standby power ratings should never be applied except in true emergency outage situations. With standby rated generators there is no overload capability built into the units.

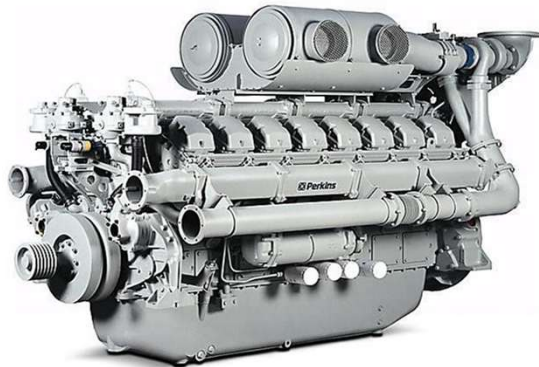

### MOTOR

Manufacturer		PERKINS
Model		4016TAG2A
Number of cylinders		16 - 60° V
Cycle		4
Aspiration		Turbocharger - intercooler
Cooling system		Water
Cooling circuit capacity	liter	52
Oil capacity	liter	237,2
Injection		direct
Speed/Frequency	rpm/Hz	1500/50
Fuel consumption	100%	434
	75%	327
	50%	222

### ALTERNATOR

Manufacturer		STAMFORD
Number of Phase		3
Power factor		cos φ 0,8
Frequency [Hz]		50
Output voltage [VAC]		230 / 400 V
Protection		IP 23
Connection type		Star
Standby power	[kVA]	465
Insulation class		Class H
Model		PI734F

### OTHER INFO

web: [www.maaggenerator.com](http://www.maaggenerator.com)

### TANÚSÍTVÁNY

A MARTON Szakértő Iroda Kft.  
2040 Budaörs, Aradi u. 32.  
igazolja, hogy a

LogSol Kft.

Székhely: H-8151 Szabadbattyán, Ipar utca 098/6. hrsz.

az

szüntetéses tüpegyszegk kereskedelme, karbantartása, javítása, valamint aggregátorok, mobil aggregátorok gyártása, kereskedelme, javítása és karbantartása, egyéb általános rendeltetésű gép gyártása

érvényességét területén környezetvédelmi irányítási rendszeren vezetett be és alkalmas.

A tanúsítvány regisztrációs száma: 0392190

A feltüntetett adatai során bizonyították azt, hogy a rendszer

MEGFELEL

MSZ EN ISO 14001:2015

szabvány követelményeinek.

A tanúsítvány érvényes: 2020. február 27-ig

az érvényességét feltételeknek igazolással meillett.

Budaörs, 2020. február 28.

MARTON Szakértő Iroda Kft.  
Előzetes



MARTON

### TANÚSÍTVÁNY

A MARTON Szakértő Iroda Kft.  
2040 Budaörs, Aradi u. 32.  
igazolja, hogy a

LogSol Kft.

Székhely: H-8151 Szabadbattyán, Ipar utca 098/6. hrsz.

az

aggregátorok, mobil aggregátorok gyártása, karbantartása, javítása, kereskedelme, valamint szüntetéses tüpegyszegk karbantartása, javítása, kereskedelme, egyéb általános rendeltetésű gép gyártása

érvényességét területén minőségirányítási rendszeren vezetett be és alkalmas.

A tanúsítvány regisztrációs száma: 0392190

A feltüntetett adatai során bizonyították azt, hogy a rendszer

MEGFELEL

MSZ EN ISO 9001:2015

szabvány követelményeinek.

A tanúsítvány érvényes: 2020. február 09-ig

az érvényességét feltételeknek igazolással meillett.

Budaörs, 2020. február 03.

MARTON Szakértő Iroda Kft.  
Előzetes



MARTON



All of our products are made in Hungary in our own factory. Please kindly be notified that We reserve the right to make changes without the prior consent of the buyer except the standby and prime power which are always guaranteed. Thank you for understanding.  
All pictures shown here are for illustration purpose only.

MSZ EN ISO 14001:2015, MSZ EN ISO 9001:2015